



Warranty, Finishing and Installation

Clear, LowE or GBG - Lifetime Warranty on Frame and Glass

Injection Molded White or Tan Polypropylene Frames

Maintenance-free frame does not require painting or staining. If painting is desired, use primer and paint labeled 'for plastics'. Then use 2 coats of clear polyurethane. Using paint thinners or similar chemicals will void warranty and damage sealants.

Install with screws to inside; do not over tighten (max 18-20 inch/lbs).




Blinds Between Glass - Lifetime Warranty on Frame and Glass

Injection Molded White or Tan Polypropylene Frames

Maintenance-free frame does not require painting or staining. If painting is desired, use primer and paint labeled 'for plastics'. Then use 2 coats of clear polyurethane. Using paint thinners or similar chemicals will void warranty and damage sealants.

Install with screws to inside; do not over tighten (max 18-20 inch/lbs).

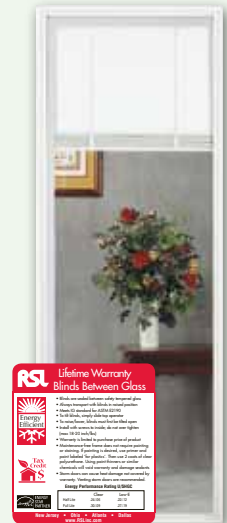

Hurricane Impact - Lifetime Warranty on Frame and Glass

Extruded Vinyl White Frames

Maintenance-free frame does not require painting or staining. If finishing is desired, avoid using primer & apply 2 coats of exterior latex or gel stain. Then top coat with 2 coats of clear polyurethane. Using paint thinners or similar chemicals will void warranty and damage sealants.

Installation: remove tabs from glass; place frame with glass on table; neatly apply 3/16" bead of Dow 995 sealant perimeter of frame. Lower door cut-out onto frame; place inside frame into cut-out & snap frames together tightly; install screws into pre-drilled holes loosely; tighten with max. 8-10 inch/lbs; snap 2 short caps on inside frame; install 2 longer caps by bowing in middle to complete.



Decorative Doorglass - Lifetime Warranty on Frame and Glass

Injection Molded White or Tan ASA Frames

Maintenance-free frame does not require painting or staining. If finishing is desired, avoid using primer & apply 2 coats of exterior latex or gel stain. Then top coat with 2 coats of clear polyurethane. Using paint thinners or similar chemicals will void warranty and damage sealants.

Install with screws to inside; do not over tighten (max 18-20 inch/lbs).



RSL offers a full line of energy efficient doorglass that can help meet the energy requirements of the Federal Tax Credit.

October 2011
www.RSLinc.com